



# HA26 RTJ 0

## Performance & Productivity

- Very good working envelop
- Vertical arm rise - Basket remains parallel to wall
- Outstanding RT capabilities
- basket load capacity 250 kg
- Dual load 250-350 kg (option)

## Safety and Comfort

- Quick, proportional, precised and simultaneous movements
- Activ' Lighting System safe load (option)
- Haulotte Activ' Shield Bar 2.0 (option)

## Maximized Total Cost of Ownership

- Haulotte Activ' Screen on board diagnostic tool
- Haulotte Stop Emission System wich automatically turns off & on the engine
- Easy access to all components
- Large modular basket, quick and easy to repair

**Haulotte**





# HA26 RTJ 0

ROUGH TERRAIN ARTICULATED BOOMS

## TECHNICAL DATA

### HA26 RTJ 0

|                                   |                                          |
|-----------------------------------|------------------------------------------|
| Working height                    | 26.4 m                                   |
| Platform height                   | 24.4 m                                   |
| Horizontal outreach               | 17.5 m                                   |
| Up and over clearance             | 9.3 m                                    |
| Lift capacity                     | 250 kg                                   |
| <b>F</b> x <b>G</b> Platform size | 2.44 x 0.91 m                            |
| <b>A</b> Length - stowed          | 11.8 m                                   |
| <b>B</b> Width                    | 2.48 m                                   |
| <b>C</b> Height - stowed          | 2.97 m                                   |
| <b>H</b> Transport length         | 9.4 m                                    |
| <b>J</b> Transport height         | 2.98 m                                   |
| Vertical jib rotation             | 133° (-65°/+68°)                         |
| Platform rotation                 | 180°                                     |
| Turntable rotation                | 360°continuous                           |
| Tailswing                         | 0.76 m                                   |
| <b>D</b> Wheelbase                | 2.8 m                                    |
| Ground clearance                  | 48 cm                                    |
| Tilt                              | 4°                                       |
| Drive speed                       | 5 km/h                                   |
| Gradeability                      | 45 %                                     |
| Tires - solid rough terrain       | 385/65-22.5                              |
| Turning radius - outside          | 6.55 m                                   |
| Power source                      | Kubota Tier 3 - 36.5 kW - variable speed |
| Weight                            | 15 500 kg                                |

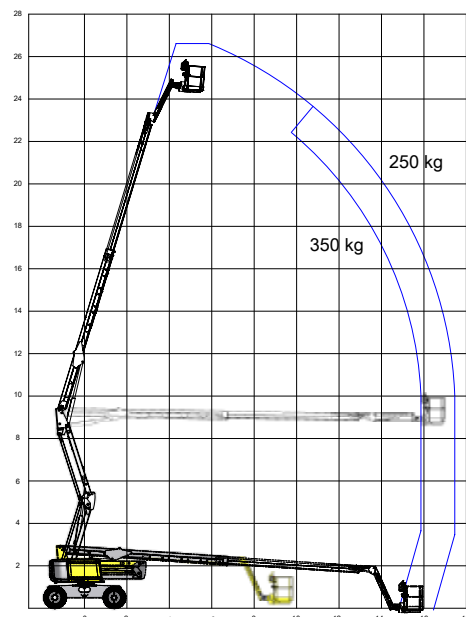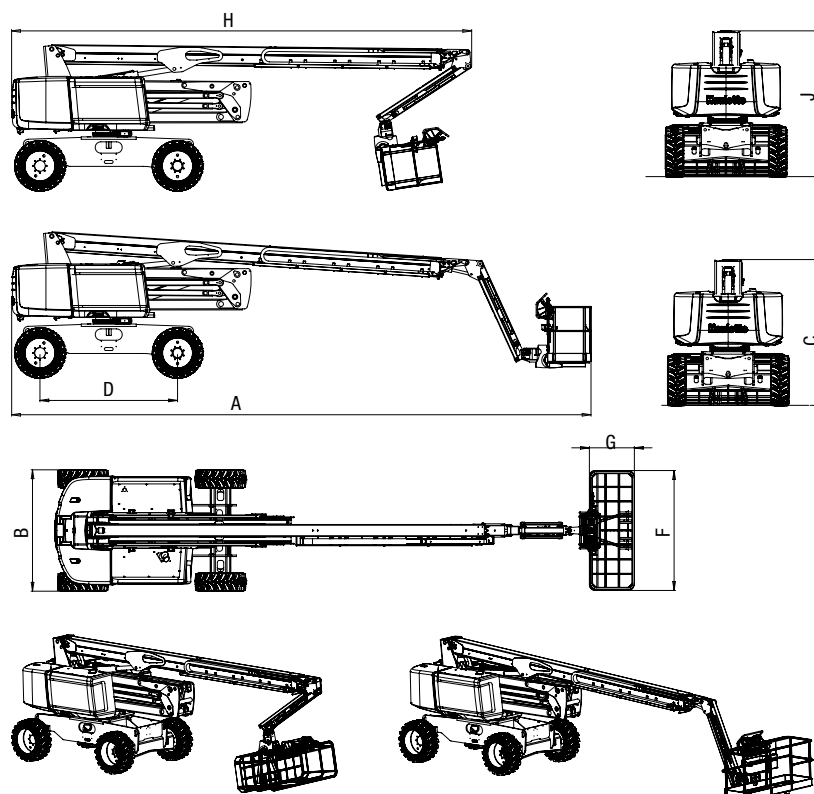

## STANDARD EQUIPMENT

- 4 wheel drive, 2 wheel steer
- Front oscillating axle
- Automatic differential wheel lock
- 250 kg / 550 lbs (2 persons) load capacity unrestricted working envelop
- 4 simultaneous movements
- Activ' Screen: embedded diagnostic system on lower control box, with color screen
- Stop Emission System : automatic engine stop system
- Large modular Haulotte basket 2.44 m x 0.91m
- Drop bar entry gate
- Upper control box cover
- Tool tray
- Swing out engine tray
- Low fuel level indicator (upper control box), fuel gauge (lower control box).
- AC power to platform (110 / 230V)
- Engine pre-heater with light indicator
- 12V battery
- Electric pump system and emergency descent
- Sound and light alarm for tilt and load
- Travel alarm
- Rotating beacon
- Universal telematics plug

## OPTIONS AND ACCESSORIES

- Activ' Lighting System, Safe load
- Activ' Shield Bar 2.0
- Dual load capacity 250 / 350 kg (restricted)
- Hydraulic generator 3.5 kW or 6.5 kW
- Power to platform (female plug in the basket)
- Air-line to platform
- Glazier pack
- Pipe cradle pack
- Working light
- Biodegradable hydraulic oil
- Cold weather kit -20° / Arctic weather kit -25°C
- Hydraulic oil cooler
- Non marking tires
- Battery circuit breaker